



# TECHNICAL SHEET

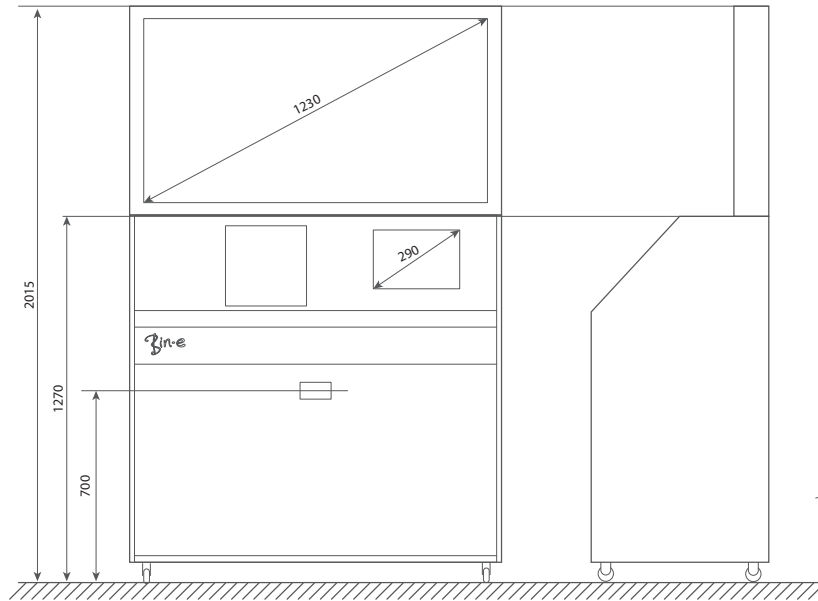

## Dimensions - casing

|                              |                                 |
|------------------------------|---------------------------------|
| height (net)                 | 127 cm / 202 CM                 |
| width (net)                  | 116 cm                          |
| depth (net)                  | 64 cm                           |
| height (gross)               | 140 cm                          |
| width (gross)                | 130 cm                          |
| depth                        | 70 cm                           |
| recognition chamber opening  | 23,5 cm x 21 cm                 |
| recognition chamber depth    | 33 cm                           |
| recognition chamber volume   | ~ 15 L (15,39 dm <sup>3</sup> ) |
| height to front cover handle | 76 cm                           |

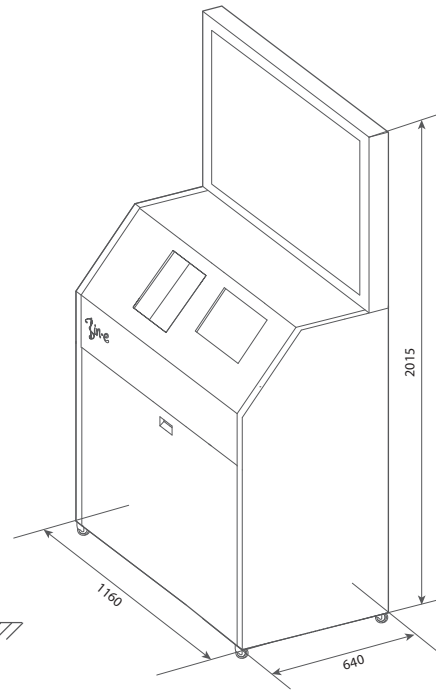

## Inner bins

|                      |                                 |
|----------------------|---------------------------------|
| height (net)         | 50 cm                           |
| width (net)          | 25 cm                           |
| depth (net)          | 60 cm                           |
| capacity per bin     | 60 L (0,06 m <sup>3</sup> ) net |
| weight               | 3,8 kg per bin                  |
| material             | low-density polyethylene        |
| approximate capacity |                                 |
| Glass                | 16,2 kg                         |
| Plastic              | 1,7 kg                          |
| Paper                | 2,2 kg                          |
| Metal                | 3,5 kg                          |

## Touchscreen

|               |               |
|---------------|---------------|
| size          | 10.1 inch     |
| resolution    | 1280 x 800 px |
| matrix        | LTC IPS       |
| certification | RoHS          |

## Other

|                                        |                                                                                                      |
|----------------------------------------|------------------------------------------------------------------------------------------------------|
| weight (net)                           | 170 kg                                                                                               |
| weight (gross)                         | 210 kg                                                                                               |
| electrical supply                      | 85 ~ 264 V AC                                                                                        |
| power consumption                      | ~ 4,28 kWh/24h                                                                                       |
| frequency                              | 50 Hz                                                                                                |
| average sound                          | 58 dB / 50 dB (super silent)                                                                         |
| maximal sound                          | 73 dB/ 68 dB (super silent)                                                                          |
| certification                          | CE, RoHS                                                                                             |
| indoor conditions temperature          | 5 - 45 °C                                                                                            |
| storage and transportation temperature | 20 - 50 °C                                                                                           |
| Security                               | electrical protection from unauthorized access, mechanical protection of electrical-electronic parts |